

0.6W EI30/5 FAPE3005 SERIES

FEATURES

Potted Under Vacuum
Two compartments bobbin
Self-extinguishing plastics UL94V-0
Degree of protection IP67
Weight: 0.04kg
Temperature class to 40 °C/B

COMMON APPLICATIONS


Medical equipments
Industrial equipments
Industrial controls
Test equipments
Industrial computers
Avionics & telecom

OPTIONS

Bulk packaging is standard
Custom design available




PHYSICAL CHARACTERISTICS

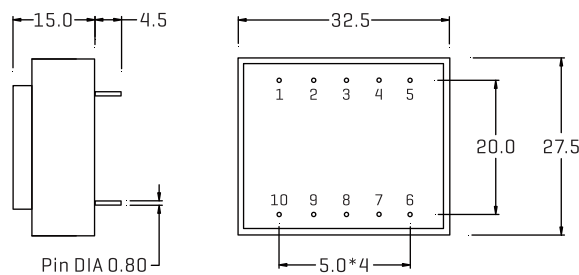

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

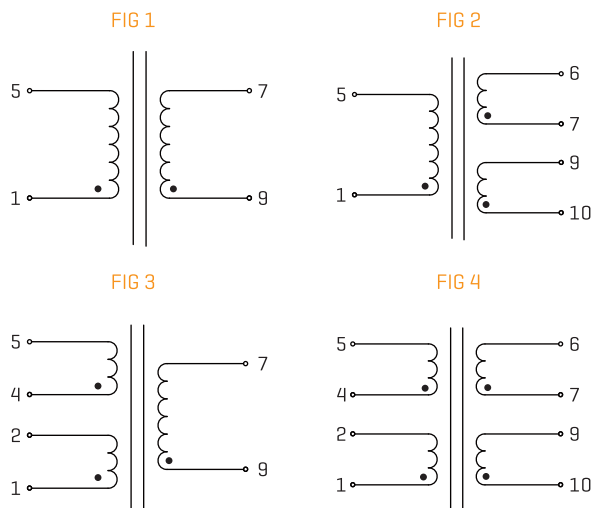

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE300513	230	6/100	9.94	1
FAPE300514	230	9/67	14.95	1
FAPE300515	230	12/50	19.9	1
FAPE300516	230	15/40	24.9	1
FAPE300517	230	18/33	29.9	1
FAPE300518	230	24/25	39.8	1
FAPE300519	230	2*6/50	2*9.94	2
FAPE300520	230	2*9/33	2*14.95	2
FAPE300521	230	2*12/25	2*19.9	2
FAPE300522	230	2*15/20	2*24.9	2
FAPE300523	230	2*18/17	2*29.9	2
FAPE300524	230	2*24/12	2*39.8	2
FAPE300525	115	6/100	9.94	1
FAPE300526	115	9/67	14.95	1
FAPE300527	115	12/50	19.9	1
FAPE300528	115	15/40	24.9	1
FAPE300529	115	18/33	29.9	1
FAPE300530	115	24/25	39.8	1
FAPE300531	115	2*6/50	2*9.94	2
FAPE300532	115	2*9/33	2*14.95	2
FAPE300533	115	2*12/25	2*19.9	2
FAPE300534	115	2*15/20	2*24.9	2
FAPE300535	115	2*18/17	2*29.9	2
FAPE300536	115	2*24/12	2*39.8	2
FAPE300537	2*115	6/100	9.94	3
FAPE300538	2*115	9/67	14.95	3
FAPE300539	2*115	12/50	19.9	3
FAPE300540	2*115	15/40	24.9	3
FAPE300541	2*115	18/33	29.9	3
FAPE300542	2*115	24/25	39.8	3
FAPE300543	2*115	2*6/50	2*9.94	4
FAPE300544	2*115	2*9/33	2*14.95	4
FAPE300545	2*115	2*12/25	2*19.9	4
FAPE300546	2*115	2*15/20	2*24.9	4
FAPE300547	2*115	2*18/17	2*29.9	4
FAPE300548	2*115	2*24/12	2*39.8	4