

2W EI30/15.5 FAPE3015 SERIES

FEATURES

Two compartments bobbin
Self-extinguishing plastics UL94V-0
Degree of protection IP67
Weight: 0.1kg
Temperature class to 70°C/B

OPTIONS


Bulk packaging is standard
Custom design available



COMMON APPLICATIONS


Medical equipments
Industrial equipments
Industrial controls
Test equipments
Industrial computers
Avionics & telecom

PHYSICAL CHARACTERISTICS

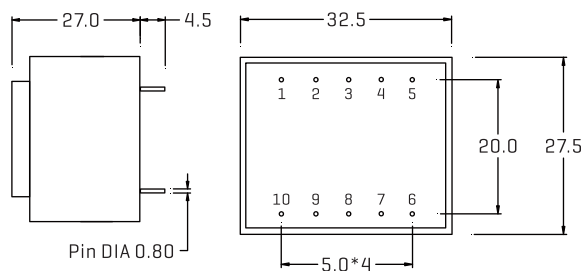

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

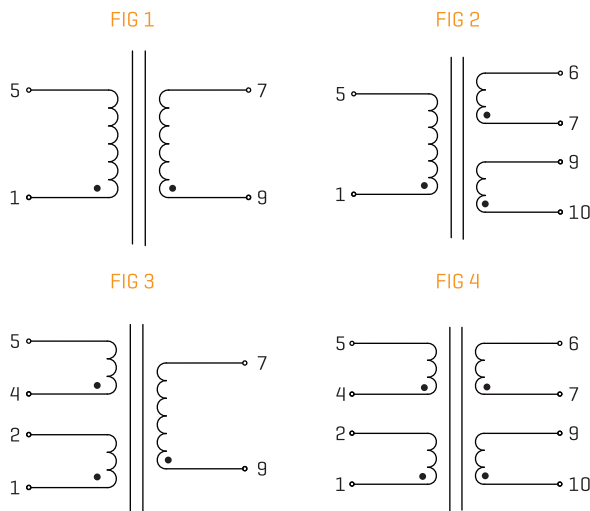

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE301521	230	6/333	10.4	1
FAPE301522	230	9/222	14.6	1
FAPE301523	230	12/167	20.0	1
FAPE301524	230	15/133	25.8	1
FAPE301525	230	18/111	29.6	1
FAPE301526	230	24/83	37.2	1
FAPE301527	230	2*6/167	2*10.4	2
FAPE301528	230	2*9/111	2*14.6	2
FAPE301529	230	2*12/83	2*20.0	2
FAPE301530	230	2*15/66	2*25.8	2
FAPE301531	230	2*18/55	2*29.6	2
FAPE301532	230	2*24/42	2*37.2	2
FAPE301533	115	6/333	10.4	1
FAPE301534	115	9/222	14.6	1
FAPE301535	115	12/167	20.0	1
FAPE301536	115	15/133	25.8	1
FAPE301537	115	18/111	29.6	1
FAPE301538	115	24/83	37.2	1
FAPE301539	115	2*6/167	2*10.4	2
FAPE301540	115	2*9/111	2*14.6	2
FAPE301541	115	2*12/83	2*20.0	2
FAPE301542	115	2*15/66	2*25.8	2
FAPE301543	115	2*18/55	2*29.6	2
FAPE301544	115	2*24/42	2*37.2	2
FAPE301545	2*115	6/333	10.4	3
FAPE301546	2*115	9/222	14.6	3
FAPE301547	2*115	12/167	20.0	3
FAPE301548	2*115	15/133	25.8	3
FAPE301549	2*115	18/111	29.6	3
FAPE301550	2*115	24/83	37.2	3
FAPE301551	2*115	2*6/167	2*10.4	4
FAPE301552	2*115	2*9/111	2*14.6	4
FAPE301553	2*115	2*12/83	2*20.0	4
FAPE301554	2*115	2*15/66	2*25.8	4
FAPE301555	2*115	2*18/55	2*29.6	4
FAPE301556	2*115	2*24/42	2*37.2	4

2.3W EI30/15.5 FAPE3015 SERIES



FEATURES

Vacuum filling
Two compartments bobbin
Self-extinguishing plastics UL94V-0
Degree of protection IP 00
Weight: 0.10kg
Temperature class to 50 °C/B


OPTIONS

Bulk packaging is standard
Custom design available

COMMON APPLICATIONS

Medical equipments
Industrial equipments
Industrial controls
Test equipment
Industrial computers
Avionics & telecom

PHYSICAL CHARACTERISTICS

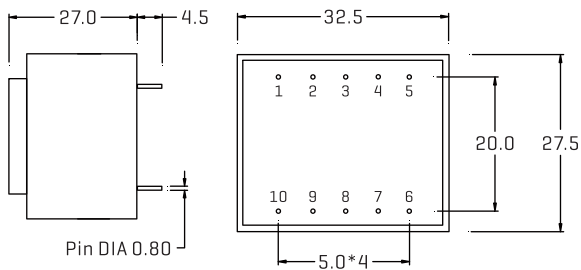


ALL DIMENSIONS IN MM

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
FAPE301557	230	6/384	10.5	1
FAPE301558	230	9/256	15.5	1
FAPE301559	230	12/192	21.0	1
FAPE301560	230	15/154	25.3	1
FAPE301561	230	18/128	31.0	1
FAPE301562	230	24/96	42.0	1
FAPE301563	230	2*6/192	2*10.5	2
FAPE301564	230	2*9/128	2*15.5	2
FAPE301565	230	2*12/96	2*21.0	2
FAPE301566	230	2*15/77	2*25.3	2
FAPE301567	230	2*18/64	2*31.0	2
FAPE301568	230	2*24/48	2*42.0	2
FAPE301569	115	6/384	10.5	1
FAPE301570	115	9/256	15.5	1
FAPE301571	115	12/192	21.0	1
FAPE301572	115	15/154	25.3	1
FAPE301573	115	18/128	31.0	1
FAPE301574	115	24/96	42.0	1
FAPE301575	115	2*6/192	2*10.5	2
FAPE301576	115	2*9/128	2*15.5	2
FAPE301577	115	2*12/96	2*21.0	2
FAPE301578	115	2*15/77	2*25.3	2
FAPE301579	115	2*18/64	2*31.0	2
FAPE301580	115	2*24/48	2*42.0	2
FAPE301581	2*115	6/384	10.5	3
FAPE301582	2*115	9/256	15.5	3
FAPE301583	2*115	12/192	21.0	3
FAPE301584	2*115	15/154	25.3	3
FAPE301585	2*115	18/128	31.0	3
FAPE301586	2*115	24/96	42.0	3
FAPE301587	2*115	2*6/192	2*10.5	4
FAPE301588	2*115	2*9/128	2*15.5	4
FAPE301589	2*115	2*12/96	2*21.0	4
FAPE301590	2*115	2*15/77	2*25.3	4
FAPE301591	2*115	2*18/64	2*31.0	4
FAPE301592	2*115	2*24/48	2*42.0	4

TECHNICAL INFORMATION

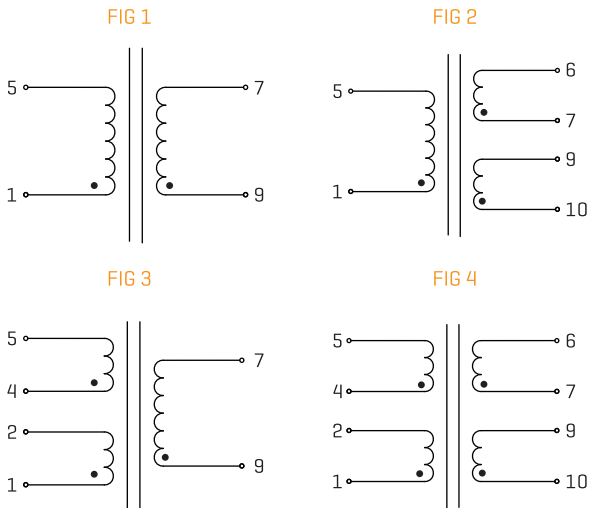

2.4W EI30/15.5 FAPE3015 SERIES


FEATURES

Vacuum filling
Two compartments bobbin
Self-extinguishing plastics UL94V-0
Degree of protection IP 00
Weight: 0.10kg
Temperature class to 40 °C/B

COMMON APPLICATIONS


Medical equipments
Industrial equipments
Industrial controls
Test equipment
Industrial computers
Avionics & telecom

PHYSICAL CHARACTERISTICS

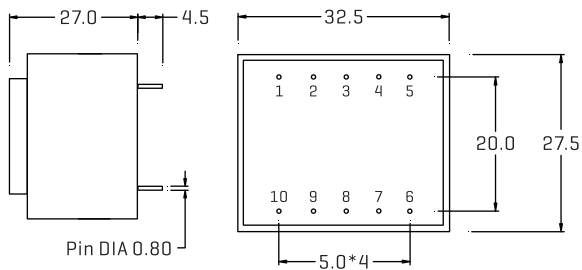

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

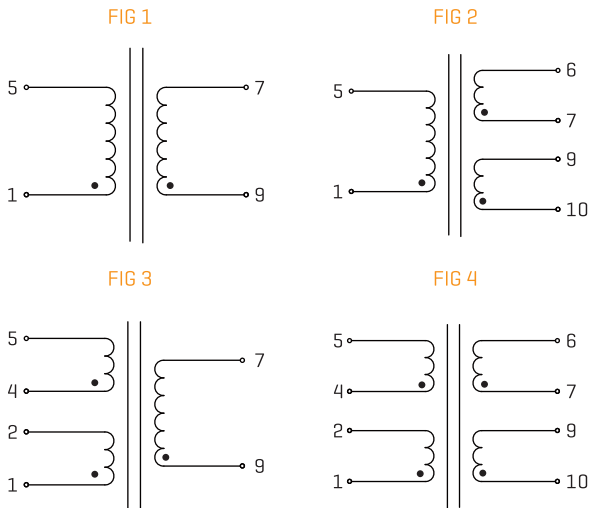

OPTIONS

Bulk packaging is standard
Custom design available



ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE301593	230	6/400	10.5	1
FAPE301594	230	9/267	15.5	1
FAPE301595	230	12/200	21.0	1
FAPE301596	230	15/160	25.3	1
FAPE301597	230	18/133	31.0	1
FAPE301598	230	24/100	42.0	1
FAPE301599	230	2*6/200	2*10.5	2
FAPE3015100	230	2*9/133	2*15.5	2
FAPE3015101	230	2*12/100	2*21.0	2
FAPE3015102	230	2*15/80	2*25.3	2
FAPE3015103	230	2*18/67	2*31.0	2
FAPE3015104	230	2*24/50	2*42.0	2
FAPE3015105	115	6/400	10.5	1
FAPE3015106	115	9/267	15.5	1
FAPE3015107	115	12/200	21.0	1
FAPE3015108	115	15/160	25.3	1
FAPE3015109	115	18/133	31.0	1
FAPE3015110	115	24/100	42.0	1
FAPE3015111	115	2*6/200	2*10.5	2
FAPE3015112	115	2*9/133	2*15.5	2
FAPE3015113	115	2*12/100	2*21.0	2
FAPE3015114	115	2*15/80	2*25.3	2
FAPE3015115	115	2*18/67	2*31.0	2
FAPE3015116	115	2*24/50	2*42.0	2
FAPE3015117	2*115	6/400	10.5	3
FAPE3015118	2*115	9/267	15.5	3
FAPE3015119	2*115	12/200	21.0	3
FAPE3015120	2*115	15/160	25.3	3
FAPE3015121	2*115	18/133	31.0	3
FAPE3015122	2*115	24/100	42.0	3
FAPE3015123	2*115	2*6/200	2*10.5	4
FAPE3015124	2*115	2*9/133	2*15.5	4
FAPE3015125	2*115	2*12/100	2*21.0	4
FAPE3015126	2*115	2*15/80	2*25.3	4
FAPE3015127	2*115	2*18/67	2*31.0	4
FAPE3015128	2*115	2*24/50	2*42.0	4