

## 36W EI66/23 FAPE6623H SERIES



### FEATURES

Frequency 50/60Hz  
 Potted under vacuum  
 Split-bobbin  
 Temperature class ta 40°C/B  
 Weight: 0.75kg  
 Packaging unit: 6 pieces [tray]

### OPTIONS

Bulk packaging is standard  
 Custom design available


### COMMON APPLICATIONS

Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom

### ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.	Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE662301H	230	6/6000	6.9	1	FAPE662311H	2*115	6/6000	6.9	3
FAPE662302H	230	9/4000	10.3	1	FAPE662312H	2*115	9/4000	10.3	3
FAPE662303H	230	12/3000	13.6	1	FAPE662313H	2*115	12/3000	13.6	3
FAPE662304H	230	15/2400	17	1	FAPE662314H	2*115	15/2400	17	3
FAPE662305H	230	18/2000	20.5	1	FAPE662315H	2*115	18/2000	20.5	3
FAPE662306H	230	24/1500	27	1	FAPE662316H	2*115	24/1500	27	3
FAPE662307H	230	2*6/3000	2*6.9	2	FAPE662317H	2*115	2*6/3000	2*6.9	4
FAPE662308H	230	2*9/2000	2*10.5	2	FAPE662318H	2*115	2*9/2000	2*10.5	4
FAPE662309H	230	2*12/1500	2*13.6	2	FAPE662319H	2*115	2*12/1500	2*13.6	4
FAPE662310H	230	2*15/1200	2*17.3	2	FAPE662320H	2*115	2*15/1200	2*17.3	4

### PHYSICAL CHARACTERISTICS

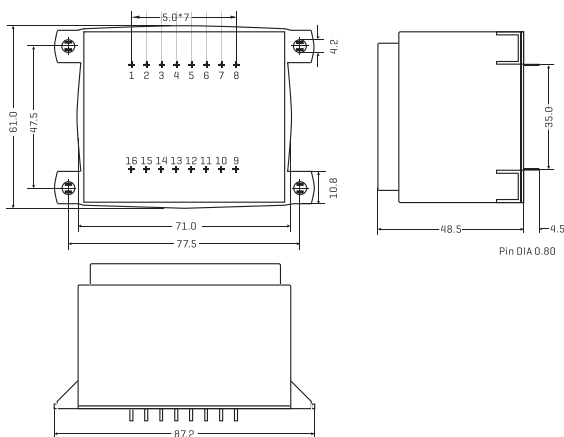

ALL DIMENSIONS IN MM

### TECHNICAL INFORMATION

