


Dimension: (UNIT:mm)

A	12.4±0.3
B	7.4±0.15
C	4.85±0.2
D	5.1±0.1
E	8.8Min
F	2.4±0.1
I	1.5±0.1

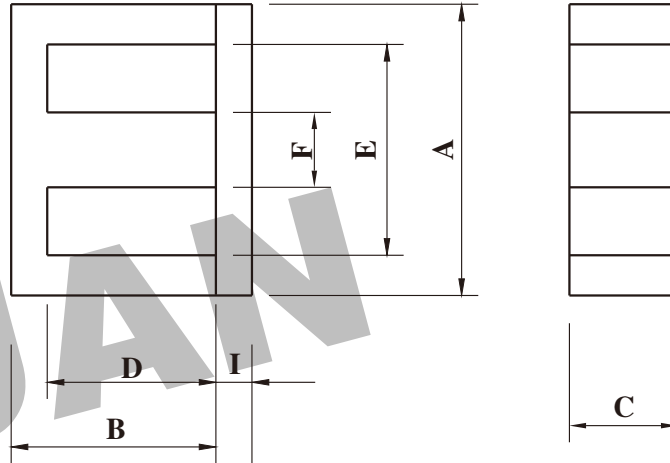


Test conditions

AL: F=1.0KHz U=0.3V N=10Ts

Effective parameter

C1(mm) ⁴	Ae(mm ²)	Le(mm)	Ve(mm ³)	Weight(g)
1.477	14.4	21.3	308	≈0.9

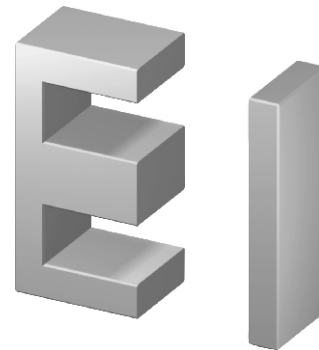

Core sets for use in combination with an I core.

Properties of core sets under power conditions

AL measured in combination with an I core,
Clamping force for AL measurements,20+/-10N

Grade	AL (nH)	μe	AIR GAP μm	Type number
P3	1400 ± 25%	≈1470	≈0	EI12.5-P3

Grade	B (mT)at	Core loss (w) at	
	H=250 A/m F=25KHz T=100°C	F=25 KHz B=200mT T=100°C	f=100 KHz B=100mT T=100°C
P3	≥320	≤0.08	≤0.08

Note:

- 1:Document is the property of FUAN Inc & is not allow to be duplicated without authorization
- 2:RoHS compliant.