

10W UI39/8 FAUI3908 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.28kg
 Packaging unit: 10 pieces (tray)
 Fixing material for 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS



ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI390837	2*115	2*6/833	2*8.2
FAUI390838	2*115	2*9/555	2*12.3
FAUI390839	2*115	2*12/416	2*16.4
FAUI390840	2*115	2*15/333	2*20.5
FAUI390841	2*115	2*18/277	2*24.6
FAUI390842	2*115	2*24/208	2*32.8

TECHNICAL INFORMATION

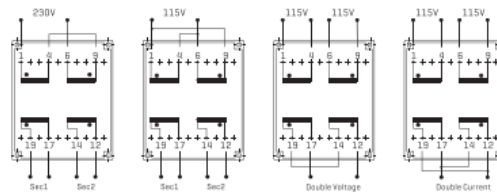

ALL DIMENSIONS IN MM