

14W UI39/10.2 FAUI3910 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.315kg
 Packaging unit: 10 pieces (tray)
 Fixing material for: 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS



ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI391043	2*115	2*6/1166	2*7.5
FAUI391044	2*115	2*9/778	2*11.2
FAUI391045	2*115	2*12/563	2*15.0
FAUI391046	2*115	2*15/467	2*18.8
FAUI391047	2*115	2*18/389	2*22.4
FAUI391048	2*115	2*24/292	2*30.0

TECHNICAL INFORMATION

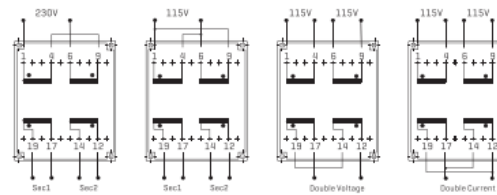

ALL DIMENSIONS IN MM