

24W UI39/17 FAUI3917 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.445kg
 Packaging unit: 10 pieces (tray)
 Fixing material for 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS



ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI391755	2*115	2*6/2000	2*7.2
FAUI391756	2*115	2*9/1333	2*11.1
FAUI391757	2*115	2*12/1000	2*14.4
FAUI391758	2*115	2*15/800	2*19.2
FAUI391759	2*115	2*18/666	2*22.1
FAUI391760	2*115	2*24/500	2*28.8

TECHNICAL INFORMATION

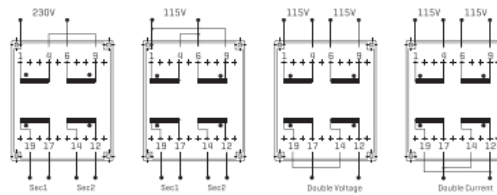

ALL DIMENSIONS IN MM