



P/N: FACCF23BV-273Y1R4




Outline Dimensions(Unit:mm)




Orthographic view



Side view




Top view




Bottom view

Electronical Schematic



"." Dotted terminal

Recommended Soldering Temperature Graph.

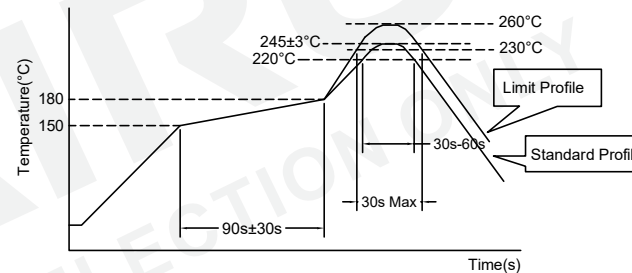

	Standard Profile	Standard Profile
Pre-heating	150~180°C,90s±30s	
Heating	above 220°C,30s-60s	above 240°C,30s Max
Peak temperature	245°C±3°C	260°C,10s
Cycle of reflow	2 times	2 times

Electrical Characteristics(at 25°C)

Inductance : L1-2=4-3= 27.0mH +50%/-30%,at 10KHZ,0.1V.  
 Leakage Inductance: L1-2&4-3= 1000uH Typ.  
 Rated current: 1.40Amps.  
 D.C.Resistance : 1-2= 0.440 ohms Typ.  
 4-3= 0.440 ohms Typ.  
 Turns Ratio : Wdg1:Wdg2= 1:1±2%,at 20KHZ,1V.  
 Hipot : Pri-Sec : 1500VAC/5mA/2Second.

List of UL Certificate:

Part Name	Mat'l Description	Supplier	UL Number
Bobbin	FK-2302/PA66	E I Dupont De Nemours & Co Inc	E41938
Copper wire	2UEW-F/155C	Elektrisola Hangzhou Co Ltd	E258243
Core	TL5-FT23-8-7-C	TDG Holding Co Ltd	N/A
	TL5-I14.6-7-2.5-C	TDG Holding Co Ltd	N/A

\*\*\*Weight:Approx 19g.

				Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX: +86-550-7831133	 Tolerances unless otherwise specified: (.X)±0.50 (XX)±0.25 Unit of measurement: mm	Make: Qiumei.Liu Checked: Beson. zhan Approved: Anson. zhan	<b>DRAWING TITLE</b> UT23 Current-compensated frame core double chokes Material Number: A24CCF23S230	Customer P/N: Document/Rev: 00 Specification Sheet: 1 of 1 Date of Recognition: Dec./23/2019
REV	DESCRIPTION	APPD	DATE					