
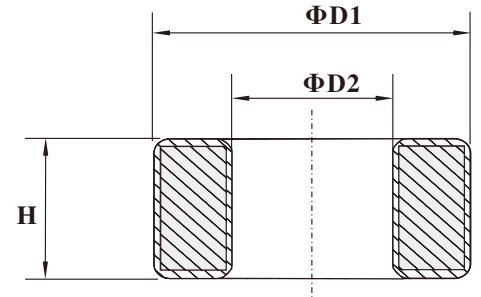


P3 **T25.4*12.7*9.35** **C/P**
Material **Core Size** **Coating**
 材质 品名 涂装

C=Epoxy. P=Parylene.


Dimensions: (UNIT:mm)

Dimensions(mm)			
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	Wt(g/set)
25.4±0.40	12.7±0.40	9.35±0.30	21.50
26.40max	11.8min	10.25max	

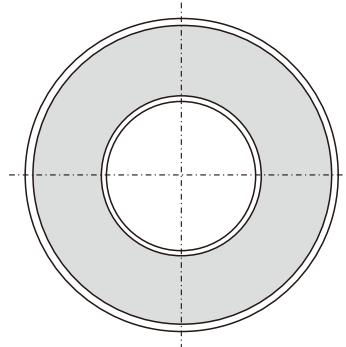

Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

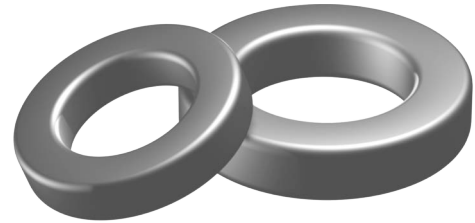

Effective parameter

	Ve(mm3)	Ae(mm2)	Le(mm)
	3210	58.1	55.3

Coating


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	3100±25%	≈2300	T25.4/12.7/9.35/P3
H5K	6500±25%	≈5000	T25.4/12.7/9.35/H5K
H7K	9100±25%	≈7000	T25.4/12.7/9.35/H7K
H10K	13000±30%	≈10000	T25.4/12.7/9.35/H10K

Note:


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K



H7K

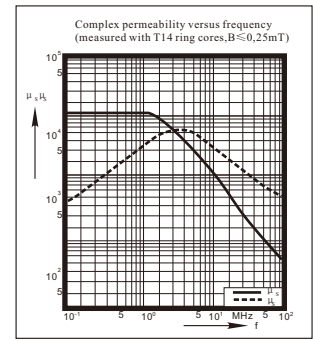

H10K