



PAIRUI



Http://fuantronics.com

P3 **T4*2*2** **HP**
Material **Core Size** **Coating**
 材质 品名 涂装

HP:Parylene Coating of Ja;pgem-Free


Dimensions: (UNIT:mm)

Dimensions(mm)			
Parylene Coating Dimensions(mm)			
ΦD1	ΦD2	H	Wt(g/set)
4.0±0.3	2.0±0.2	2.0±0.1	0.09
4.0±0.3	2.0±0.2	2.0±0.1	

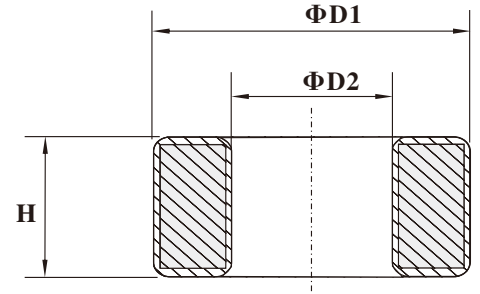

Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

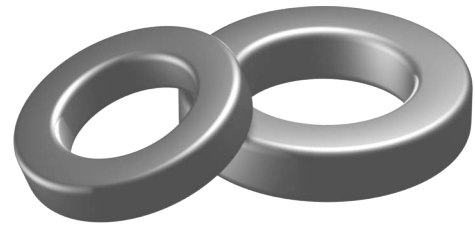

Effective parameter

	Ve(mm3)	Ae(mm2)	Le(mm)
	11.8	1.3	9.06

Coating


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	430±25%	≈2300	T4/2/P3
H5K	900±25%	≈5000	T4/2/H5K
H7K	1260±25%	≈7000	T4/2/H7K
H10K	1800±30%	≈10000	T4/2/H10K

Note:


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.

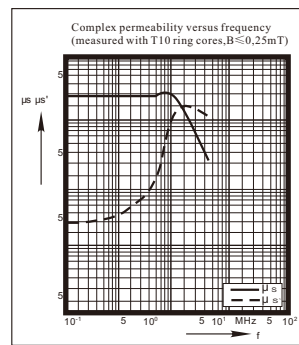


P3



H5K



H7K



H10K