

ASQ05 Series 5Watt

FEATURES:

- ✓ Small size, high power density
- ✓ Wide input voltage range: 85~265Vac or 120~370Vdc
- ✓ Wide output voltage range: 3.3~24VDC
- ✓ Low on-load power consumption <0.2W
- ✓ High energy efficiency meets Energy Star requirements
- ✓ Package design is consistent with EI30 potting transformer for easy replacement
- ✓ Short circuit protection, over temperature protection, over current protection



MODEL LIST

Model number	Nominal input voltage	Output voltage	Output power	Maximum output current	efficiency	Maximum ambient temperature	authentication
ASQ05020	85-265VAC	3.3V	2.5W 4.5W	750mA 1350mA	65%	70°C 50°C	UL, CUL, CE, CB, FCC, UKCA
ASQ05021	85-265VAC	5V	2.75W 5W	550mA 900mA	68%	70°C 50°C	UL, CUL, CE, CB, FCC, UKCA
ASQ05022	85-265VAC	9V	3.2W 5W	360mA 560mA	73%	70°C 50°C	UL, CUL, CE, CB, FCC, UKCA
ASQ05023	85-265VAC	12V	3.2W 5W	270mA 420mA	75%	70°C 50°C	UL, CUL, CE, CB, FCC, UKCA
ASQ05024	85-265VAC	15V	3.2W 5W	170mA 320mA	75%	70°C 50°C	UL, CUL, CE, CB, FCC, UKCA
ASQ05025	85-265VAC	18V	3.2W 5W	180mA 280mA	78%	70°C 50°C	UL, CUL, CE, CB, FCC, UKCA
ASQ05026	85-265VAC	24V	3.2W 5W	130mA 220mA	80%	70°C 50°C	UL, CUL, CE, CB, FCC, UKCA
ASQ05027	85-265VAC	3.8V	4.5W	1180mA	66%	50°C	UL, CUL, CE, CB, FCC, UKCA

ASQ05 Series 5Watt

ELECTRICAL PARAMETER


item	Conditions	min	typ	max	unit
Input voltage		85	---	265	Vac
		120	---	370	Vdc
Input frequency	Vin=85~265Vac	47	---	63	Hz
Input current	Full load, Vin=85~265Vac/120~370Vdc	---	0.2	---	A
Inrush current	Cold start, Vin=230Vac	---	---	15	A
Standby power	No load, rated output voltage	---	---	0.2	W
Output voltage accuracy	Rated input voltage, full load	---	±5	---	%
Line regulation	Vin from 85~265Vac or 120~370Vdc	---	±3	---	%
Load regulation	Vout from min. to max.	---	±5	---	%
Dynamic Response(Vout)	50%~100% load, 1A/us, 1Khz, 50% duty ratio	---	---	110	%
Turn-on delay time	Rated input voltage, full load, cold start	---	---	3	S
Turn-on rise time	Rated input voltage, full load	---	---	50	ms
Hold up time	Rated input voltage, full load	5	---	---	ms
Overshoot	Rated input voltage, full load	---	---	10	%
Undershoot	Rated input voltage, full load	---	---	10	%
Ripple	Refer to below note	---	200	---	mV P-P
Short circuit	Hiccup mode, can be automatically restored after abnormal removal, will not produce overheating, odor, plastic deformation				
Over temperature	130-150°C, shut off output voltage, it will recover automatically after the temperature turn to normal				
Over current	When output current exceeds the rated range, it will be protected automatically, and will recover automatically after fault condition is removed				
Ambient operating temperature	Startup at rated voltage	-25	---	/	°C
Operating relative humidity	Non condensing	10	---	90	%
Storage temperature	Humidity 5 ~ 95% RH	-40	---	+85	°C
MTBF	Full load, 220Vac input, 25°C ambient temperature	500	---	---	Khrs
Dimension(LxWxH)	32.8 x 27.8 x 21.8mm, pin length 4mm				
Weigh	30.5g				
Safety	Design refer to UL/CUL60950, UL/CUL62368, IEC/EN60950, IEC/EN61558-2-16, IEC/EN62368				
Withstand voltage	I/P-O/P: 4KVAC, 5mA, 3s				
EMI	Design refer to EN55032, EN55014, FCC part15, Class B under 3dB margin				
Harmonic wave	Design refer to EN61000-3-2:2014 ClassA				
Voltage fluctuation and flicker	Design refer to EN61000-3-3:2013				
ESD	Design refer to IEC61000-4-2:2008 Contact discharge ±4KV, air discharge ±8KV				
Rf field intensity sensitivity	Design refer to IEC61000-4-3:2006+A1:2007+A2:2010				
EFT	Design refer to IEC61000-4-4:2012 ±1KV				

ASQ05 Series 5Watt

ELECTRICAL PARAMETER



surge	Design refer to IEC61000-4-5:2014 ±1KV
Conduction sensitivity	Design refer to IEC61000-4-6:2013
Voltage drop and interruption	Design refer to IEC61000-4-11:2004

OVERALL DIMENSION

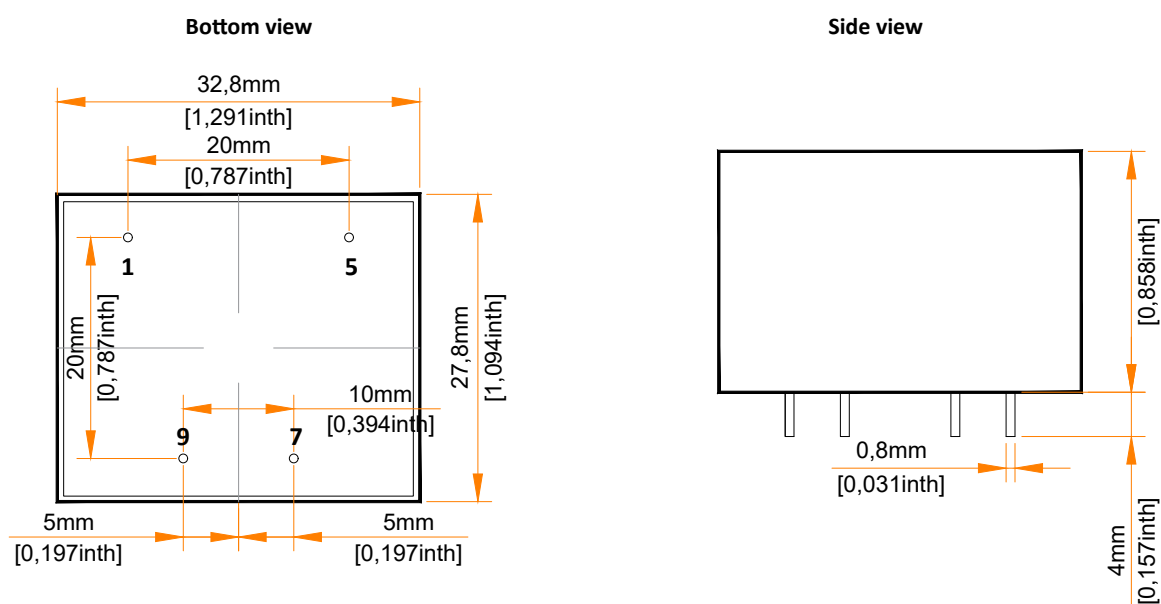

PIN DEFINITION

NO	DEFINITION
1	AC(L)
5	AC(N)
7	VOUT(+)
9	VOUT(0V)

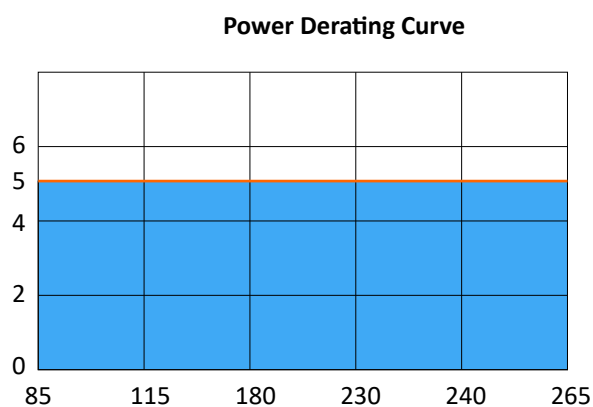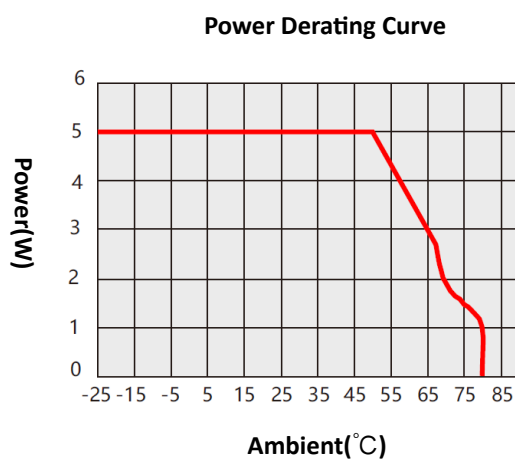ELECTRICAL CURVE


ASQ05 Series 5Watt

APPLICATION GUIDE

1. Storage guide


Storage temperature: -40°C to $+85^{\circ}\text{C}$, storage humidity: 5% to 95%

2. Warranty Guide

In order to best ensure the reliability and life of the power supply, we recommend customers to use within 6 months. If the power supply is stored unused for more than 12 months, Then we recommend that the product needs to be aged for 2 hours before use.

3. Suitable for applications that require high EMC performance

This product is certified to EN55022 and EN55014 CLASS B EMC without any additional internal components. As follows
The circuit can meet the more stringent EMC performance requirements.

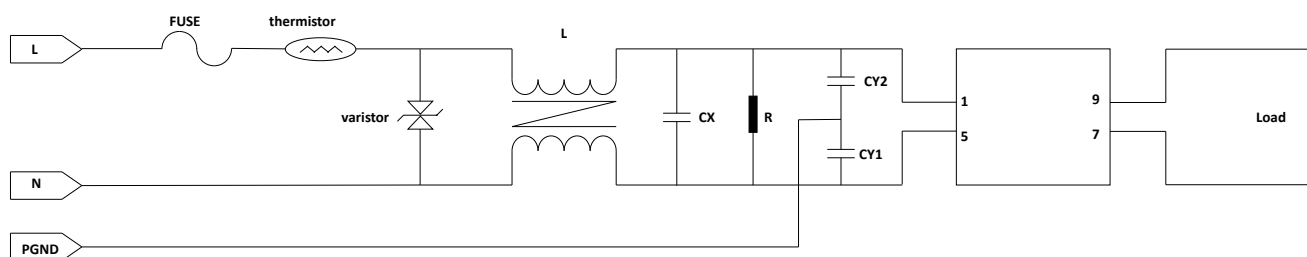

Fuse: Recommended parameters: 5A to 10A/250Vac, slow-acting fuse type

Thermistor: Recommended parameters: 2A, 5Ω , 1.8W to 5A D10, 2.5Ω , 2.4W.

Varistor: Recommended parameters: 14D471, 300Vac, maximum energy 118 joules.


L is common mode inductor: Recommended parameter: 10mH to 30mH

CX is an X2 capacitor: Recommended parameters: 0.1uF to 0.22uF/275Vac

R is a resistor: Suggested parameter: 1.0MQ to 3.0 MQ2.


4. Suitable for grounding:

The application does not support ASQ/ASP products



5. High surge circuit

The ASQ /ASP series tests and certificates surge levels to 1EC61000-4-5 and does not require any additional external components. To wave
When the surge level is increased to 6KV, the following external circuits may be recommended.

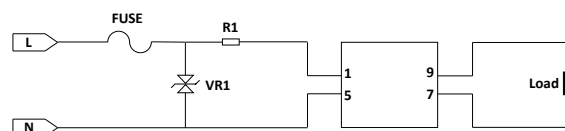

VR1 is a varistor, recommended parameters: 14D471, 300 Vac, maximum energy 118 joules.

R1 is a winding resistor, recommended parameters: 10R/1W~10R/3W, resistance wire diameter 0.1 to 0.23mm.

F1 is a fuse, recommended parameters: 6.3A to 10A/250 VAC, slow-acting fuse.