

DMV10W

4:1 Input, Isolated Regulated Output
10W DC-DC Module Power Supply



Product Family Features

- Wide voltage input 4:1
- No external element required
- Continuous short circuit protection and self-recovery
- Operating temperature range: -40°C~+85°C
- Isolation Voltage: 1500VDC
- Metal shield package
- International standard pin mode
- 100% full load aging

Models

Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (mA)	Efficiency Typ.	Capacitive Load [Max] (uF)
DMV10W-2420	24(9-36)	±3.3	±1515	80	3300
DMV10W-2421	24(9-36)	±5	±1000	83	2200
DMV10W-2425	24(9-36)	±9	±556	85	1000
DMV10W-2422	24(9-36)	±12	±417	86	680
DMV10W-2423	24(9-36)	±15	±333	87	470
DMV10W-2424	24(9-36)	±24	±208	87	220
DMV10W-2410	24(9-36)	3.3	3030	80	4700
DMV10W-2411	24(9-36)	5	2000	82	3300
DMV10W-2415	24(9-36)	9	1111	85	2200
DMV10W-2412	24(9-36)	12	833	86	1000
DMV10W-2413	24(9-36)	15	667	87	680
DMV10W-2414	24(9-36)	24	417	88	470

Product Datasheet

Models

Model	Inputvoltage (Vdc)	Outputvoltage (Vdc)	Outputcurrent (mA)	Efficiency Typ.	Capacitive Load [Max](uF)
DMV10W-4820	48(18-72)	±3.3	±1515	80	3300
DMV10W-4821	48(18-72)	±5	±1000	83	2200
DMV10W-4825	48(18-72)	±9	±556	85	1000
DMV10W-4822	48(18-72)	±12	±417	86	680
DMV10W-4823	48(18-72)	±15	±333	87	470
DMV10W-4824	48(18-72)	±24	±208	87	220
DMV10W-4810	48(18-72)	3.3	3030	80	4700
DMV10W-4811	48(18-72)	5	2000	83	3300
DMV10W-4815	48(18-72)	9	1111	85	2200
DMV10W-4812	48(18-72)	12	833	87	1000
DMV10W-4813	48(18-72)	15	667	88	680
DMV10W-4814	48(18-72)	24	417	89	470

Input Specifications

Parameter	Min.	Typ.	Max.	Note
Input Undervoltage Protection	6.6 Vdc	7.3 Vdc	-	Input voltage 24Vdc
	13.5 Vdc	14.8 Vdc	-	Input voltage 48Vdc
Starting Voltage	-	8.2 Vdc	9 Vdc	Input voltage 24Vdc
	-	16.2 Vdc	18 Vdc	Input voltage 48Vdc
Impulse Voltage (1sec.max)	-0.7 Vdc	-	50 Vdc	Input voltage 24Vdc
	-0.7 Vdc	-	100 Vdc	Input voltage 48Vdc
No-load Current	-	5 mA	10 mA	Input voltage 24Vdc
	-	3 mA	5 mA	Input voltage 48Vdc

Output Specifications

Parameter	Min.	Typ.	Max.	Note
Output Power	0W		10W	
Output Positive Voltage Accuracy	-	±1%	±2%	
Output Negative Voltage Accuracy	-	±2%	±3%	
Line Voltage Regulation	-	±0.2%	±0.5%	
Load Regulation	-	±0.5%	1%	
Ripple & Noise	-	50	100	mV P-P
Output Short Circuit Protection	Sustainable and automatic restoration			

Product Datasheet

General Specifications


Parameter	Min.	Typ.	Max.	Note
Storage Humidity	5%	-	95%	
Operating Temps	-40°C	-	85°C	
Storage Temps	-55°C	-	125°C	
Operating Case Temps	-	20°C	35°C	
Pin Welding Temps	-	-	300°C	
Temps Drift Coefficient	-	-	±0.03%/°C	
Switching Frequency	-	320	350	KhZ
Input Filter	π-type filtering			
Hot Plug	not supported			
MTTF	1000K h	-	-	MIL-HDBK-217@25°C
Weight	-	18g	-	
Cooling	Free air convection			
Case Material	Black metal shell			

Safety&EMC Compliance



Isolation Voltage 1 minute, leakage current 1mA max	Ip to Op:1.5kV	
	IP/OP-FG:1KV	
Isolation Resistance 500VDC, 25°C, 70%RH	1000M Ω	
EMI	CE	CISPR32/EN55032 CLASS B (see EMI recommended circuit)
	RE	CISPR32/EN55032 CLASS B (see EMI recommended circuit)
EMS	ESD	IEC/EN61000-4-2 CONTACT ±4KV perf. Criteria B
	RS	IEC/EN61000-4-3 10V/M perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV (see EMS recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5 Line-Line ±2KV (see EMS recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6 3 VR.M.S perf. Criteria A
	Voltage sag, drop and short-time interrupt immunity	IEC/EN61000-4-29 0%, 70% perf. Criteria B

Product Datasheet

Dimensions & Interface Definition

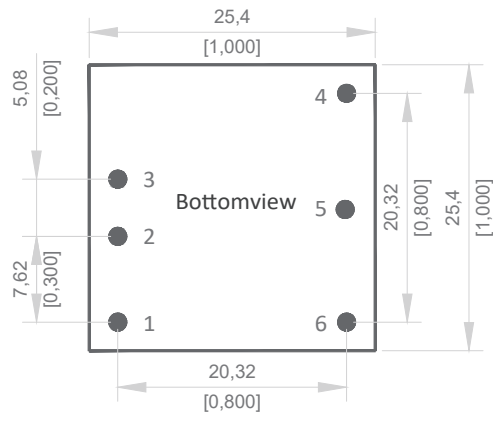

UNIT: mm
[Inth]

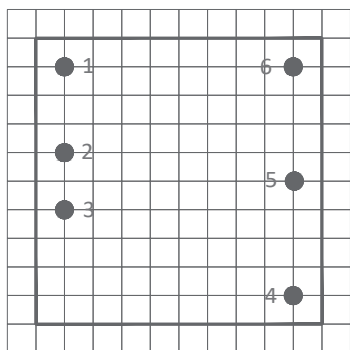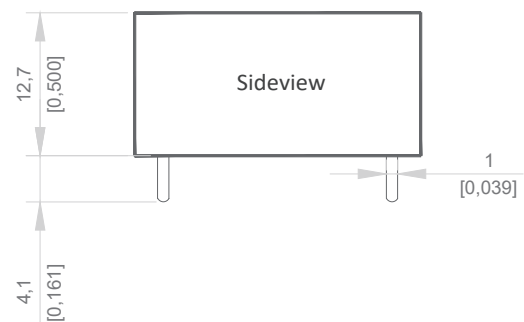


Recommended PCBA diagram

NO	Single	Double
1	NP	NP
2	GND	GND
3	VIN	VIN
4	+Vo	+Vo
5	NP	0V
6	0V	-Vo

NP: No such pin
Tolerance: $\pm 0.5\text{mm}$ [0.020inh]


Performance Curve

Ambient Temperature Derating Curve

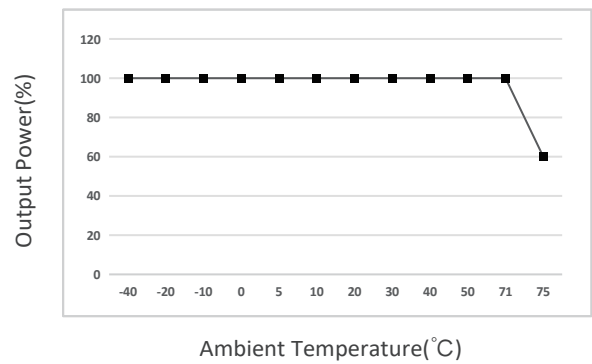

Product Datasheet


EMC Recommended Circuit

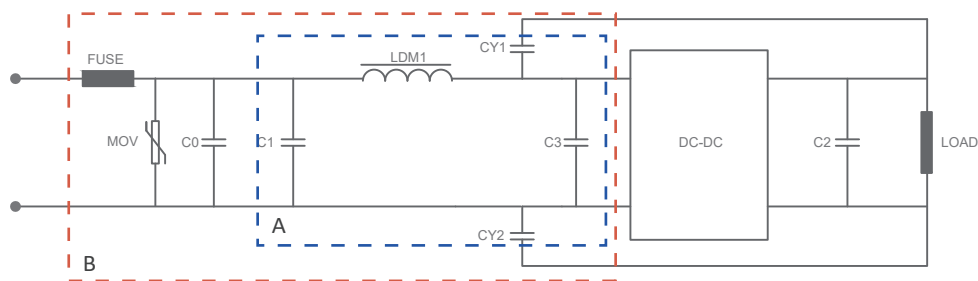

For the part selected by the frame line, Part A is used for EMI performance enhancement, and Part B is used for EMS testing.


Input Voltage	FUSE	MOV	C0,C3	C1	C2	LDM1	CY1,CY2
24Vdc	Select according to the actual input current	20D470K	330Uf/50V	1uF/50V	Refer to the output parameters in the application circuit	4.7uH	1nF/2kV
48Vdc		14D101K	330Uf/100V	1uF/100V		4.7uH	1nF/2kV

Recommended Application Circuit

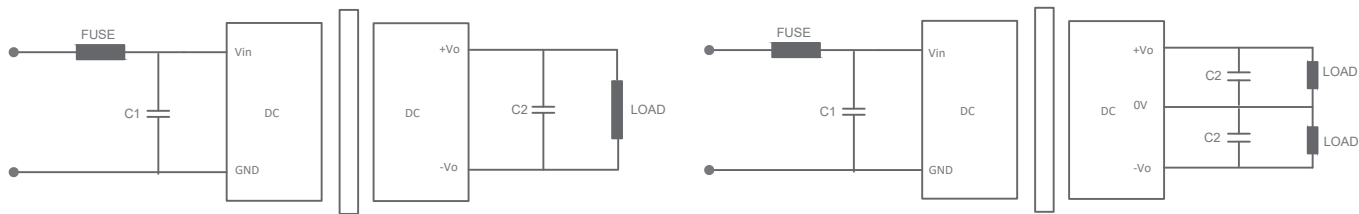

Input Voltage	External Capacitance C1	Single Output Voltage	External Capacitance C2	Double Output Voltage	External Capacitance C2
24VDC	100uF/50V	5VDC	470uF/16V	±5VDC	100uF/16V
48VDC	47uF/100V	9VDC	470uF/16V	±9VDC	100uF/16V
		12VDC	100uF/25V	±12	100uF/25V
		15VDC	100uF/25V	±15VDC	100uF/25V
		24VDC	100uF/50V	±24VDC	47uF/50V

Application precautions

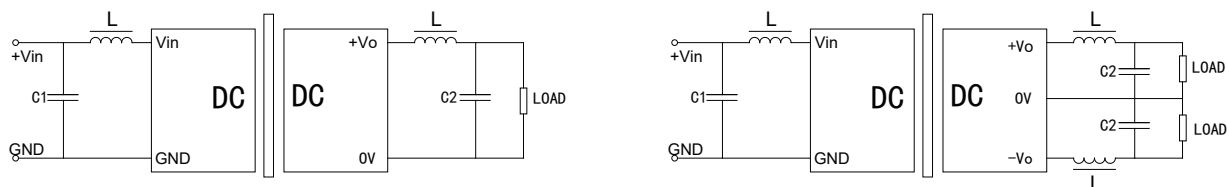

Avoid Excessive Output External Capacitance: The capacity value of the output external capacitor $C2$ should not be too large, otherwise it is easy to cause overcurrent or bad startup when the module is started. The specific value should be selected according to the external capacitor table.

The input of this series does not support parallel use of hot plug and output.

For situations requiring high ripple noise, external LC filter circuit should be connected, and the resonant frequency of LC filter should be far less than the switching frequency of DC/DC module to prevent mutual interference, resulting in output ripple increase or module damage, as shown in the figure: