

DMV15W

4:1 Input, Isolated Regulated Output
15W DC-DC Module Power Supply



Product Family Features

- Wide voltage input 4:1
- No external element required
- Continuous short circuit protection and self-recovery
- Operating temperature range: -40°C~+85°C
- Isolation Voltage:1500VDC
- Metal shield package
- International standard pin mode
- 100% full load aging

Models

Model	Inputvoltage (Vdc)	Outputvoltage (Vdc)	Outputcurrent (mA)	Efficiency Typ.	Capacitive Load [Max](uF)
DMV15W-2421	24(9-36)	±5	±1500	86	4700
DMV15W-2425	24(9-36)	±9	±833	87	2200
DMV15W-2422	24(9-36)	±12	±625	88	1000
DMV15W-2423	24(9-36)	±15	±500	89	820
DMV15W-2424	24(9-36)	±24	±313	89	680
DMV15W-2410	24(9-36)	3.3	4545	86	4700
DMV15W-2411	24(9-36)	5	3000	85	4700
DMV15W-2415	24(9-36)	9	1667	87	3300
DMV15W-2412	24(9-36)	12	1250	88	2200
DMV15W-2413	24(9-36)	15	1000	89	1000
DMV15W-2414	24(9-36)	24	625	89	820

Product Datasheet

Models

Model	Inputvoltage (Vdc)	Outputvoltage (Vdc)	Outputcurrent (mA)	Efficiency Typ.	Capacitive Load [Max](uF)
DMV15W-4821	48(18-72)	±5	±1500	86	4700
DMV15W-4825	48(18-72)	±9	±833	87	2200
DMV15W-4822	48(18-72)	±12	±625	88	1000
DMV15W-4823	48(18-72)	±15	±500	89	820
DMV15W-4824	48(18-72)	±24	±313	89	470
DMV15W-4810	48(18-72)	3.3	4545	86	4700
DMV15W-4811	48(18-72)	5	3000	85	4700
DMV15W-4815	48(18-72)	9	1667	87	3300
DMV15W-4812	48(18-72)	12	1250	88	2200
DMV15W-4813	48(18-72)	15	1000	89	1000
DMV15W-4814	48(18-72)	24	625	89	820

Input Specifications

Parameter	Min.	Typ.	Max.	Note
Input Undervoltage Protection	6.6 Vdc	7.3 Vdc	-	Input voltage 24Vdc
	13.5 Vdc	14.8 Vdc	-	Input voltage 48Vdc
Starting Voltage	-	8.2 Vdc	9 Vdc	Input voltage 24Vdc
	-	16.2 Vdc	18 Vdc	Input voltage 48Vdc
Impulse Voltage (1sec.max)	-0.7 Vdc	-	50 Vdc	Input voltage 24Vdc
	-0.7 Vdc	-	100 Vdc	Input voltage 48Vdc
No-load Current	-	5 mA	10 mA	Input voltage 24Vdc
	-	4 mA	8 mA	Input voltage 48Vdc

Output Specifications

Parameter	Min.	Typ.	Max.	Note
Output Power	0W		15W	
Output Positive Voltage Accuracy	-	±1%	±2%	
Output Negative Voltage Accuracy	-	±2%	±3%	
Line Voltage Regulation	-	±0.2%	±0.5%	
Load Regulation	-	±0.5%	1%	
Ripple & Noise	-	50	100	mV P-P
Output Short Circuit Protection	Sustainable and automatic restoration			

Product Datasheet

General Specifications


Parameter	Min.	Typ.	Max.	Note
Storage Humidity	5%	-	95%	
Operating Temps	-40°C	-	85°C	
Storage Temps	-55°C	-	125°C	
Operating Case Temps	-	20°C	35°C	
Pin Welding Temps	-	-	300°C	
Temps Drift Coefficient	-	-	±0.03%/°C	
Switching Frequency	-	320	350	KhZ
Input Filter	π-type filtering			
Hot Plug	not supported			
MTTF	1000K h	-	-	MIL-HDBK-217@25°C
Weight	-	13.6g	-	
Cooling	Free air convection			
Case Material	Black metal shell			

Safety&EMC Compliance



Isolation Voltage 1 minute, leakage current 1mA max	Ip to Op:1.5kV	
	IP/OP-FG:1KV	
Isolation Resistance 500VDC, 25°C, 70%RH	1000M Ω	
EMI	CE	CISPR32/EN55032 CLASS B (see EMI recommended circuit)
	RE	CISPR32/EN55032 CLASS B (see EMI recommended circuit)
EMS	ESD	IEC/EN61000-4-2 CONTACT ±4KV perf. Criteria B
	RS	IEC/EN61000-4-3 10V/M perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV (see EMS recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5 Line-Line ±2KV (see EMS recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6 3 VR.M.S perf. Criteria A
	Voltage sag, drop and short-time interrupt immunity	IEC/EN61000-4-29 0%, 70% perf. Criteria B

Product Datasheet

Dimensions & Interface Definition

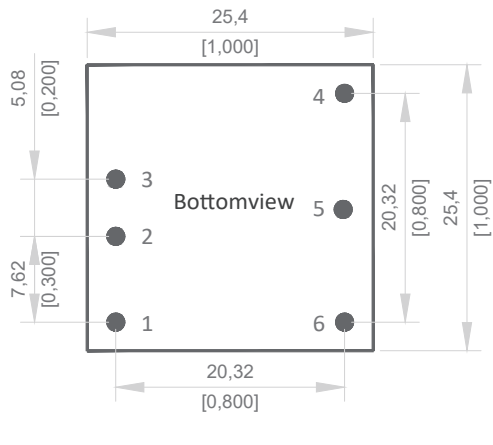

UNIT: mm
[Inth]

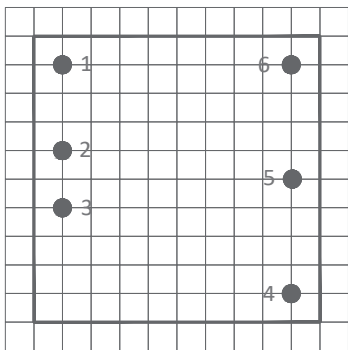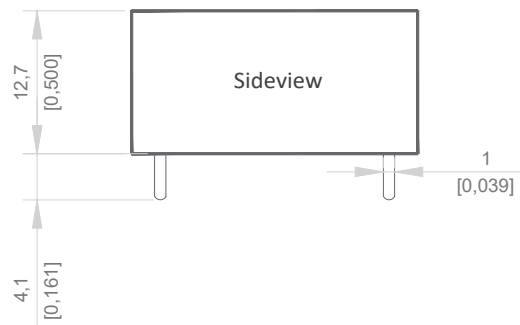


Recommended PCBA diagram

NO	Single	Double
1	NP	NP
2	GND	GND
3	VIN	VIN
4	+Vo	+Vo
5	NP	0V
6	0V	-Vo

NP: No such pin
Tolerance:±0.5mm[0.020inh]


Performance Curve

Ambient Temperature Derating Curve

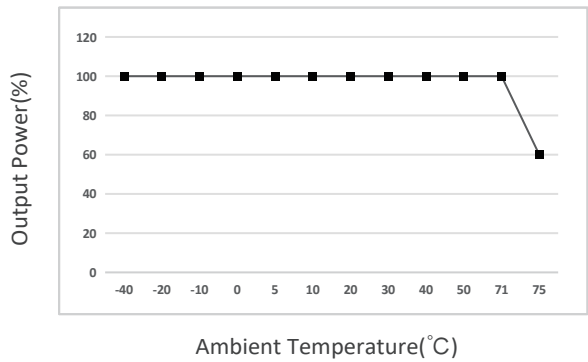

Product Datasheet


EMC Recommended Circuit

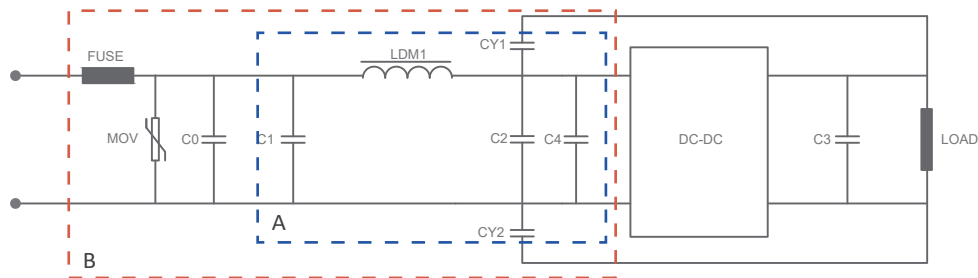

For the part selected by the frame line, Part A is used for EMI performance enhancement, and Part B is used for EMS testing.


Input Voltage	FUSE	C0,C4	C1,C2	C3	LDM1	CY1,CY2
24VDC	T/2.5A/250VAC	330uF/50V	4.7uF/50V	Refer to the output parameters in the application circuit	4.7uH	1nF/2kV
48VDC	T/1.6A/250VAC	330uF/100V	4.7uF/100V		4.7uH	1nF/2kV

Recommended Application Circuit

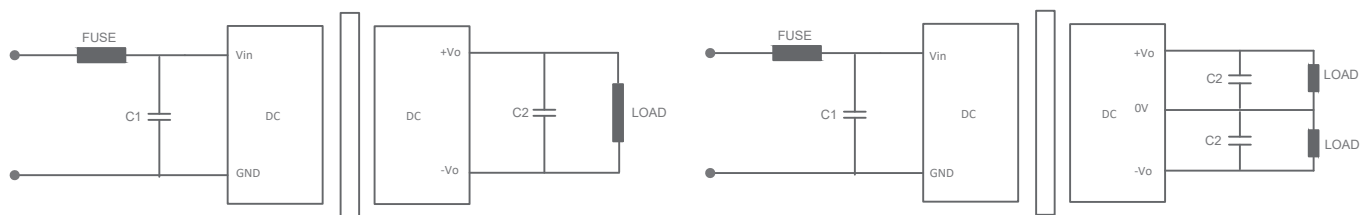

Input Voltage	External Capacitance C1	Single Output Voltage	External Capacitance C2	Double Output Voltage	External Capacitance C2
24VDC	100uF/50V	3.3/5VDC	470uF/16V	±5VDC	100uF/16V
48VDC	47uF/100V	9VDC	220uF/16V	±9VDC	100uF/16V
		12VDC	100uF/25V	±12	100uF/25V
		15VDC	100uF/25V	±15VDC	100uF/25V
		24VDC	100uF/50V	±24VDC	47uF/50V

Application precautions

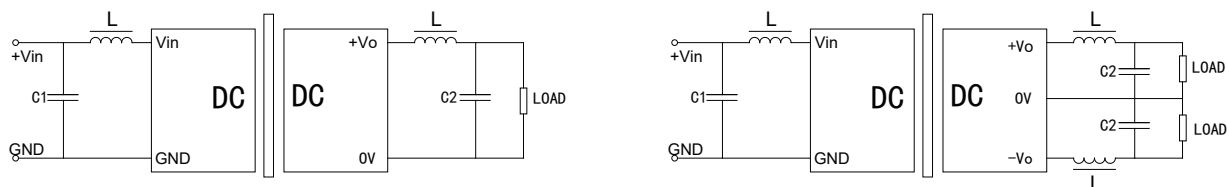

Avoid Excessive Output External Capacitance: The capacity value of the output external capacitor $C2$ should not be too large, otherwise it is easy to cause overcurrent or bad startup when the module is started. The specific value should be selected according to the external capacitor table.

The input of this series does not support parallel use of hot plug and output.

For situations requiring high ripple noise, external LC filter circuit should be connected, and the resonant frequency of LC filter should be far less than the switching frequency of DC/DC module to prevent mutual interference, resulting in output ripple increase or module damage, as shown in the figure: