



P/N: FAPE541815




Outline Dimensions(Unit:mm)




Front View



Side View

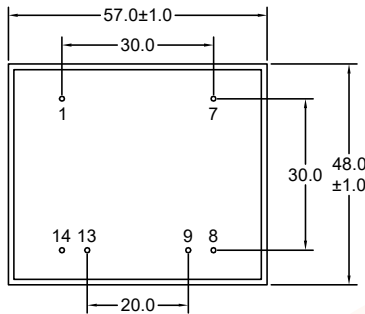

Bottom View




Top View

Note:


- 1.Remove Pins 2,3,4,5,6,10,11,12.

Wave Soldering

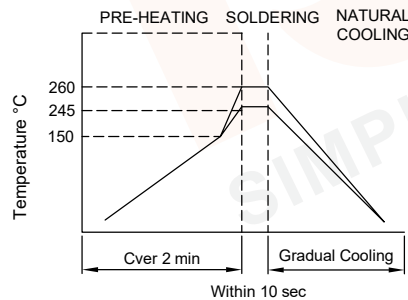

- Note:
- 1.Never Contact the ceramic with the iron tip;
 - 2.1.0mm tip diameter(max).

Electronical Schematic

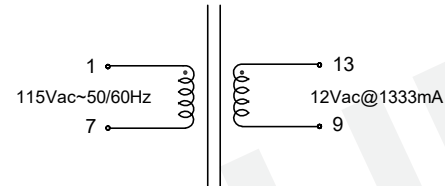


Electrical Characteristics


Input 115Vac 60Hz to 1-7:
Excitation current(Ix):40mA Max.
Output: Vo=15.0Vac Typ(No-load).
VL=12.0Vac±5%(@1333mA).
Hi-Pot: Pri-Sec:4000VAC/5mA/60Second.

General Properties

Operating Temperature:-25°C to +40°C.
Storage Temperature:-25°C to +85°C.
Insulation Class: B.
Weight: 0.42kg.


REV	DESCRIPTION	APPD	DATE	Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX: +86-550-7831133	 Tolerances unless otherwise specified: (X)±0.50 (XX)±0.25 Unit of measurement: mm	Make: Qiumei.Liu	DRAWING TITLE 16.0W Encapsulated Transformer For EI54*18.8,115VAC Input 50/60Hz	Customer Name:
						Checked: Beson. zhan		Material Number: A225418XS140
						Approved: Anson. zhan		Specification Sheet: 1 of 2
								Date of Recognition: Jan./02/2020

P/N: FAPE541815



List of UL Certificate:

No.	Part Name	Mat'l Description	Supplier	UL Number
1	Bobbin	EI54*18.8/PBT(Black)	Chang Chun Plastics Co Ltd	E59481
2	Case	CASE-EI54*18.8/PA66(Orange)	Zhejiang Juner New Materials Co Ltd	E204321
3	Copper wire	2UEW-F/155C	Elektrisola Hangzhou Co Ltd	E258243
4	Core	Lamination	Ta Yea Steel Industry Co Ltd	N/A
5	Epoxy	PU552(Black)	Wevo-Chemle Gmbh	E108835
6				

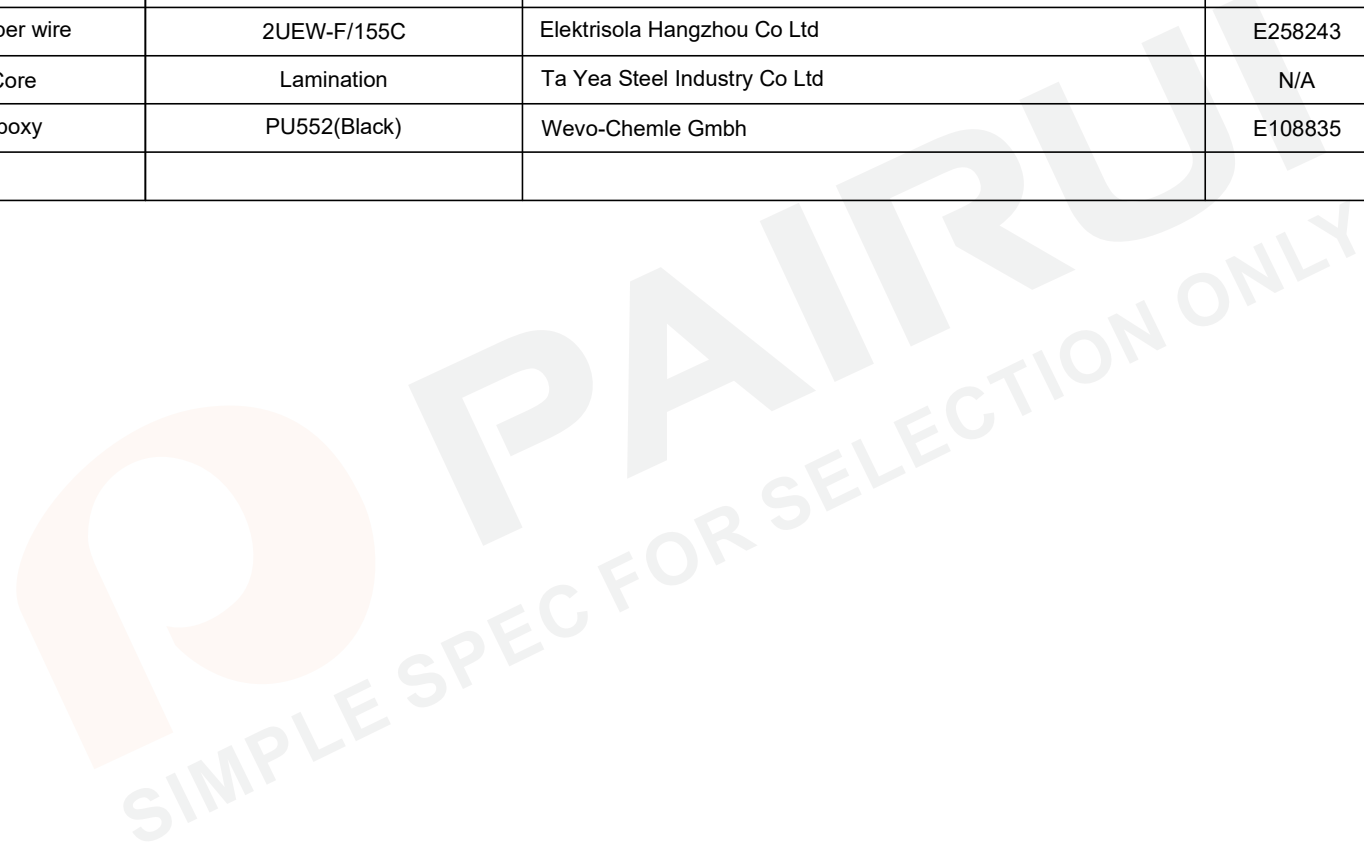

				Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX: +86-550-7831133	 Tolerances unless otherwise specified: (.X)±0.50 (XX)±0.25 Unit of measurement: mm	Make: Qiumei.Liu	DRAWING TITLE 16.0W Encapsulated Transformer For EI54*18.8,115VAC Input 50/60Hz Material Number: A225418XS140	Customer Name:
			Checked: Beson. zhan			Document/Rev: 00		
REV	DESCRIPTION	APPD	DATE			Approved: Anson. zhan		Specification Sheet: 2 of 2 Date of Recognition: Jan./02/2020