



P/N: FAPK17-682003




Outline Dimensions(Unit:mm)

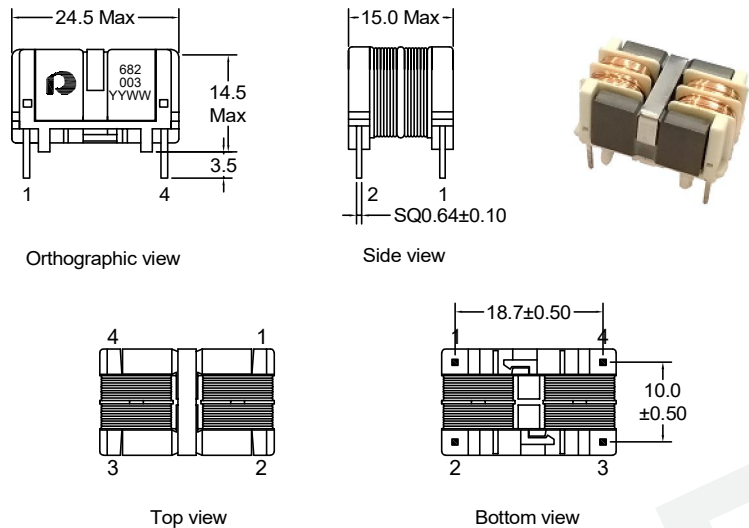


Electrical Schematic

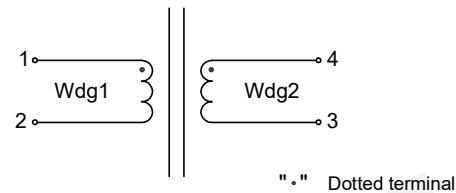

DC Current(A) VS Lkg Inductance(uH)

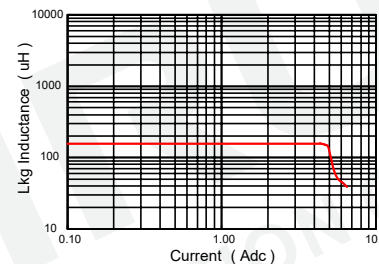

Recommended Soldering Temperature Graph.

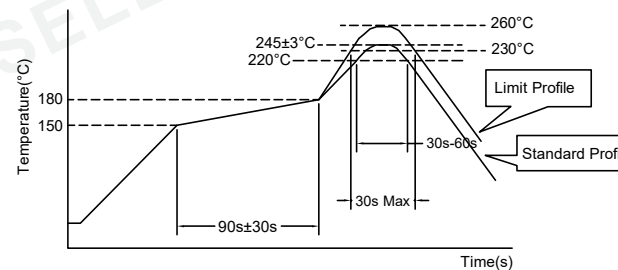

	Standard Profile	Standard Profile
Pre-heating	150~180°C,90s±30s	
Heating	above 220°C,30s-60s	above 240°C,30s Max
Peak temperature	245°C±3°C	260°C,10s
Cycle of reflow	2 times	2 times

REMARK:

- 1. Product vacuum impregnation.
- \*\*\*Weight:Approx 11.3g.

Electrical Characteristics

Inductance : L1-2=4-3= 6.8mH +50%/-30%,at 10KHZ,0.1V.  
 Leakage Inductance: L1-2&4-3= 155uH Typ.  
 Rated current: 1.30Amps.  
 D.C.Resistance : 1-2= 0.155 ohms Typ.  
                                   4-3= 0.155 ohms Typ.  
 Turns Ratio : Wdg1:Wdg2= 1:1±2%,at 20KHZ,1V.  
 Hipot : Pri-Sec : 1500VAC/5mA/2Second.

				Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX: +86-550-7831133	 Tolerances unless otherwise specified: (.X)±0.50      (.XX)±0.25 Unit of measurement: mm		Make: Qiumei.Liu Checked: Beson. zhan Approved: Anson. zhan	<b>DRAWING TITLE</b> PK17 COMMON CHOKE Material Number: A21PK17XS330	Customer P/N: Document/Rev: 1909427/00 Specification Sheet: 1 of 1 Date of Recognition: Sep./10/2019
REV	DESCRIPTION	APPD	DATE						