

AAR240



Product Features

- Efficiency up to 92%, PF>0.95,THD<10%
- Constant Current output
- Constant current drive, output current manually adjustable
- Tri-mode dimming: 0-10V, PWM, resistance (S version)
- Enables accurate dimming cutoff with precision on/off control
- Lightning protection: 15kV common mode, 6kV differential mode
- Protection Rating: IP67
- Comprehensive Protection:Input undervoltage,Output overvoltage, Overtemperature, Short circuit, Dimming interface overvoltage
- Warranty: 5 years



Technical data

Product model	Max. output Power (W)	Input Voltage (Vdc)	Output current (mA)	Output Voltage (Vdc)	PF	Efficiency	size/mm
AAR240-56-C6000	240	120-277	4300-6000	25-56	0.97	91.5%	206*63*32
AAR240-56-C6000-S	240	120-277	4300-6000	25-56	0.97	91.5%	206*63*32

※ The model number does not have a tail vertebral letter to indicate the basic model

※ The 'S' Indicates with dimming function

※ Output Power Characteristics vs. Input Voltage:

<180Vac: Output power decreases progressively

≤175Vac: 50W±20% output (derating mode)

200-277Vac: 100W rated power (normal operation)

Important: Refer to the Output Power vs. Input Voltage curve for exact performance

Technical data

Electrical Specifications

category	project	Technical Indicators	
Output parameters	Rated output current	4300-6000mA	
	Adjustable current range	3000-6000mA	@Reference AOC Curve
	Output voltage range	25-56Vdc	@At the rated output voltage, the maximum output power Po=Vo*Io=240W
	Rated output voltage	40-56Vdc	
	Default factory output current	4.3A	
	Maximum no-load output voltage	80V	
	Efficiency	90.0% @Input 180Vac, Output 40V/6A 91.3% @Input 230Vac, Output 40V/6A 91.8% @Input 277Vac, Output 40V/6A 91.0% @Input 180Vac, Output 56V/4.3A 91.9% @Input 230Vac, Output 56V/4.3A 92.2% @Input 277Vac, Output 56V/4.3A	
	Current accuracy	±5% @100% load Constant Power Range	
	Output Current Ripple	10% @ΔI=Ipk-pk/2/Io*100% LED load	
	Startup current overshoot	10% @LED Load	
	Startup time	300~1000ms @100%Load@120-277Vac	
	Linear regulation rate	±5% @100%Load	
	Load regulation rate	±5% @100%Load	
	Over temperature protection	90℃ @Casing temperature: Prolonged operation atthe highest temperature will reduce the reliability of the power supply. Pay attention to heat dissipation when in use	
	Short circuit protection	10W @Not damaged by prolonged short circuits, automatic recovery upon fault resolution	
	Input undervoltage protection	170-182V @ Derated Output with Auto Recovery After Fault Clearance	
	Input overvoltage protection	320Vac	

Remarks:

1. The dimming interface can withstand voltages within 277Vac for a short period of time (within 30 minutes) without damage, and returns to normal after the fault is resolved; when the dimming interface is connected to AC mains power, the output current drops to half of the set current value. Construction workers can quickly identify and resolve faults based on this phenomenon to avoid permanent damage to the interface;

2. All performance parameters are typical values measured at an ambient temperature of 25°C and using an LED load, unless otherwise specified;

3. When the dimming line is not in use, please seal the dimming line connector with an insulating sleeve to prevent interference signals from causing damage to the dimming line and affecting the normal operation of the power supply;

Technical data


category	project	Technical Indicators
Input parameters	Rated input voltage	120-277VAC
	Input voltage range	108-305VAC @Below 180Vac: Gradual derating initiates At ≤175Vac: 50% of rated power output
	Input frequency range	47-63HZ
	Input current	1.3A @120Vac, Half load 1.6A @180Vac, Full Load
	Input power	140W @120Vac, Half load 270W @180Vac, Full Load
	Input surge current peak value	110A @200Vac, Cold Start 130A @230Vac, Cold Start 150A @277Vac, Cold Start
	Power factor	0.99 @120Vac, Half load 0.98 @180Vac, Full Load 0.97 @277Vac, Full Load 0.9 @180-277Vac 50/60Hz, 70-100% Load
	Total harmonic distortion	7% @120Vac, Half load 8% @180Vac, Full load 10% @230Vac, Full Load 12% @277Vac, Full Load 15% @180-277Vac 50/60Hz, 70-100% Load
0-10V Dimming	External voltage range	0-12V @DIM+ output 100uA current
	Recommended dimming voltage	1-10V
	Dimming output range	10-100% @DIM+/DIM-reverse connection prohibited.
	Dimming cutoff voltage	0.2-0.4V @typical 0.3V
	Dimming start voltage	0.4-0.6V @typical 0.5V
PWM Dimming	PWM High	9.8-10.2V @DIM+ output 100uA current
	PWM Low	0-0.3V @DIM+/DIM-reverse connectionprohibited.
	PWM Frequency	500-2000Hz
	Recommended dimming duty cycle	10-100%
	Dimming output range	10-100%
	Dimming cutoff duty cycle	5-7% @Typical 6%
	Dimming start duty cycle	7-9% @Typical 8%
Resistor Dimming	External resistor	0-100KΩ @DIM+ output 100uA current
	Dimming output range	10-100%
	Dimming cutoff resistance	3-5KΩ @Typical 4KΩ
	Dimming start resistance	5-7KΩ @Typical 6KΩ
Interface protection	DIM/DIM-reversed	Main Output Shutdown
	Interface over voltage protection	400Vdc or 277Vac @Interface not damaged within 30minutes
Environment	Operating temperature	-40...90°C @Typical 60°C
	Operating humidity	10-90%RH @No condensation
	Storage temperature	-40...90°C @Typical 25°C
	Storage humidity	10-90%RH @No condensation

category	project	Technical Indicators
Safety and EMC	CCC	GB 19510.14-2009、 GB/T 17743-2021、 GB 17625.1-2022
	ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017
	CB	IEC 61347-1, IEC 61347-2-13-2016
	CE	EN 61347-2-13:2014 EN61347- 1:2008+A1:2011+A2:2013
	Conducted emission	EN 55015/GB 17743 @Conducted emission Test &Radiated emission Test
	Radiated emission	
	Harmonics Current	EN 61000-3-2 @Harmonic current emissions
	Voltage flicker	EN 61000-3-3 @Voltage Fluctuations & Flicker
	ESD	EN 61000-4-2 @Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
	Radiated Susceptibility	EN 61000-4-3 @Radio-Frequency Electromagnetic Field Susceptibility Test-RS
	Surge (transient)	EN 61000-4-5 @Surge Immunity Test:Differential Mode 6 kV, Common Mode 15 kV
	Conducted immunity	EN 61000-4-6 @Conducted Radio Frequency Disturbances Test-CS
	Power frequency magnetic field	EN 61000-4-8 @Power Frequency Magnetic Field Test
	Voltage dips and interruption	EN 61000-4-11 @Voltage Dips
	Immunity of lighting equipment	EN 61547 @Electromagnetic Immunity Requirements Applies To Lighting Equipment
	Oscillatory wave immunity	EN 61000-4-12 @Oscillatory Waves Immunity Test
	Insulation	I/P-O/P, I/P-FG, O/P-FG:100MΩ / 500VDC / 25°C/70% RH
	Dielectric strength	I/P-O/P:3.75kVac I/P-FG:1.5kVac O/P-FG:500Vac I/P-DIM&Vaux:3.75kVac O/P-DIM&Vaux:1.5kVac DIM&Vaux-FG:1.5kV
	Ground resistance	<0.1Ω, 25A/1min
	Leakage current	<0.75mA 277Vac
Other	Estimation of Mean Time Between Failures (MTBF)	215000 hours @230Vac, full load, ambient temperature 25°C
	Lifetime	50,000 hours @230Vac, full load, Tc=75°C
	International Protection	IP67 @Suitable for dry and humid environments, avoid prolonged exposure to rain
	Maximum casing temperature	90°C
	Warranty	5 Years @Casing temperature (Tc point) not exceeding 75°C
	Weight	770g @Net weight
	Dimension	206mm*63mm*32mm


Product datasheet

Exterior dimensions (unit: mm)

Note: AAR240-56-C6000

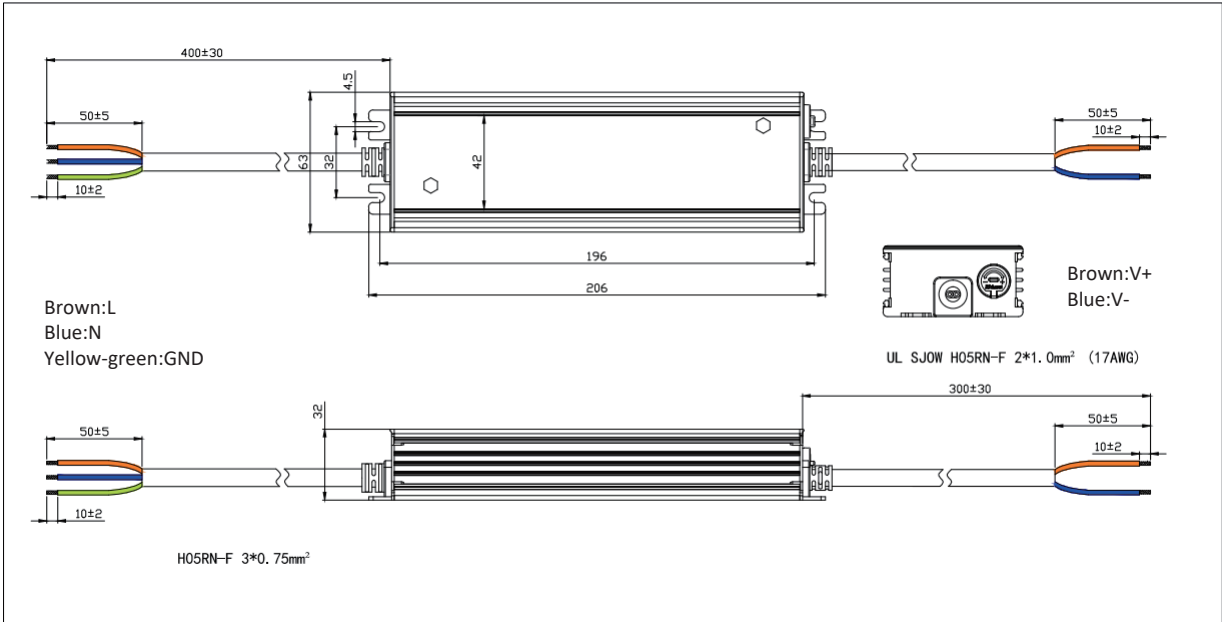


Note: AAR240-56-C6000-S


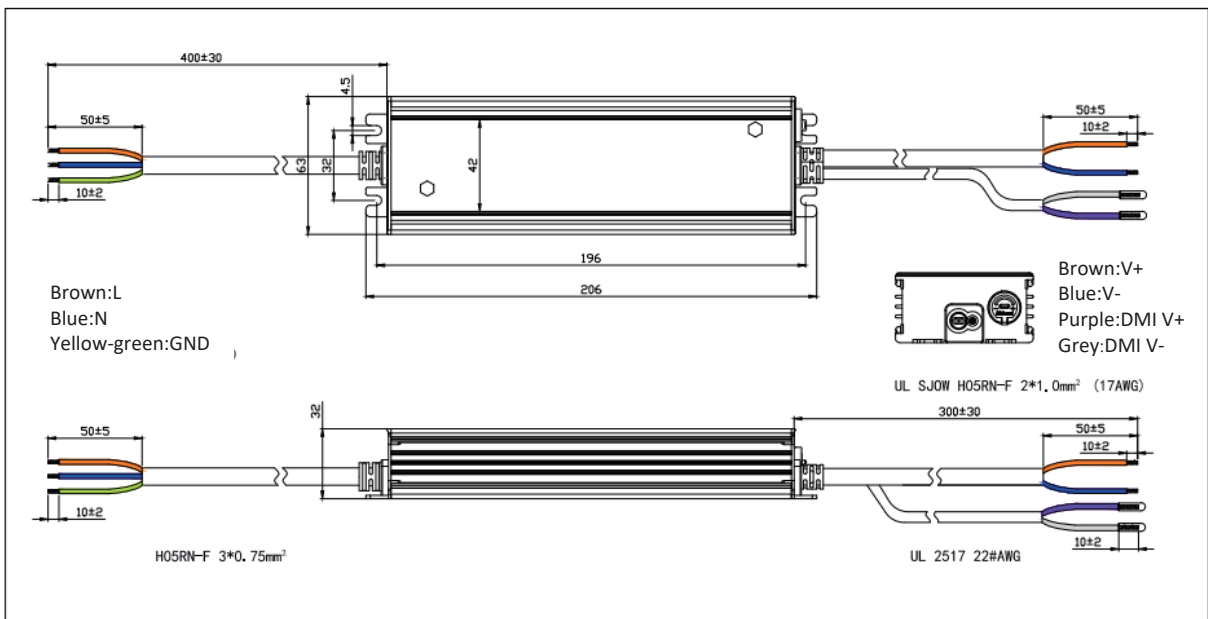


Characteristic curves





Vin	Peak current	Duration (@10% peak current)	Duration (@50% peak current)
120Vac	55A	326us	155us
230Vac	85A	332us	162us
277Vac	100A	315us	165us

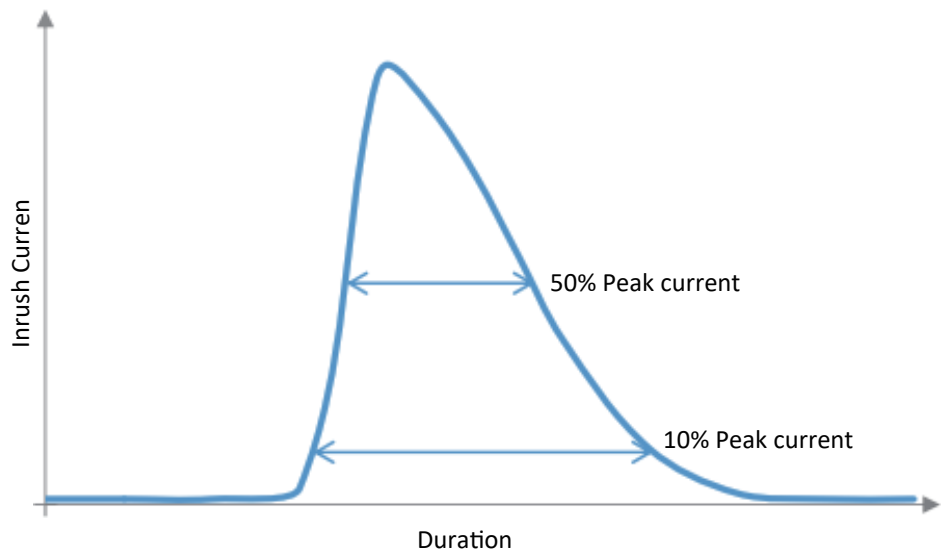

Characteristic curves

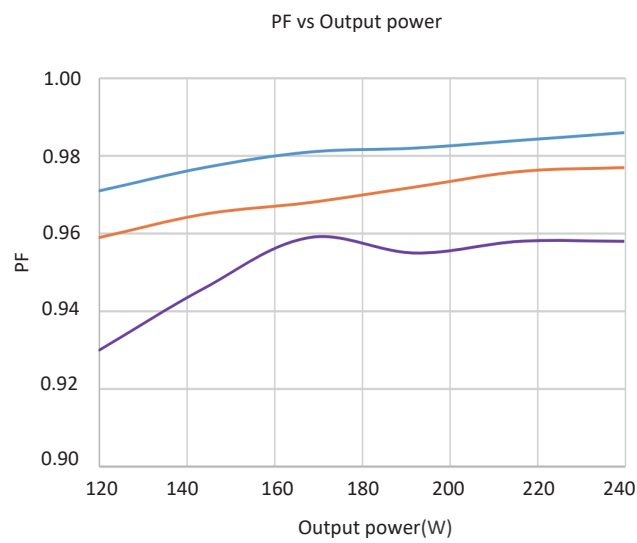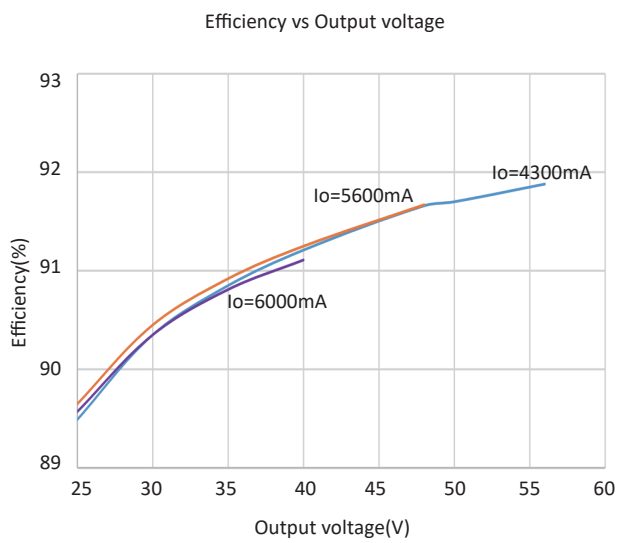


Characteristic curves

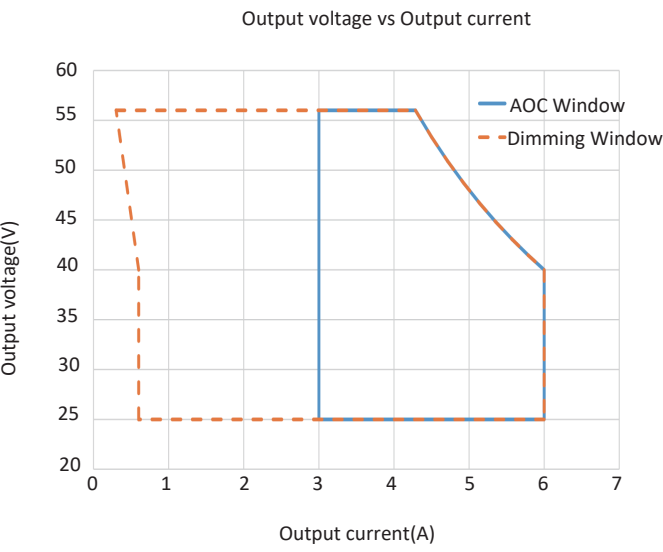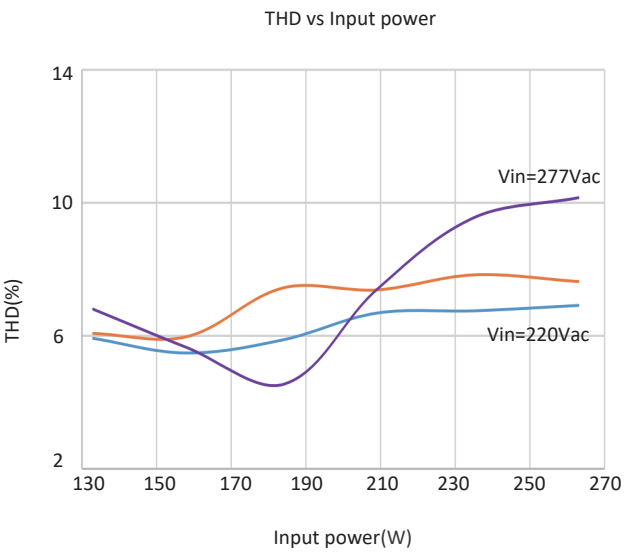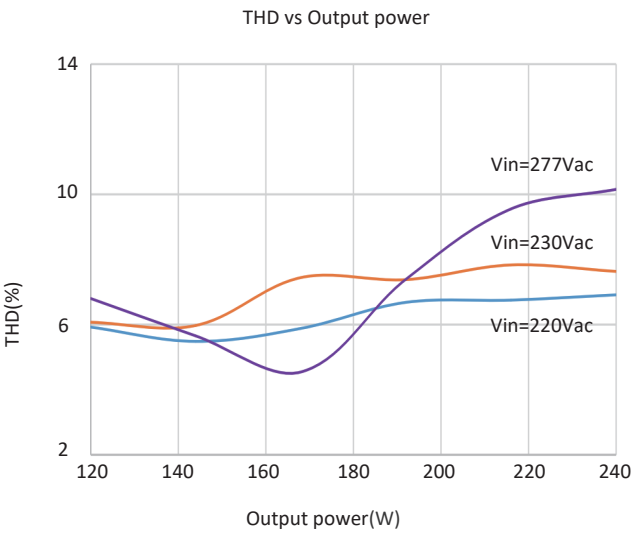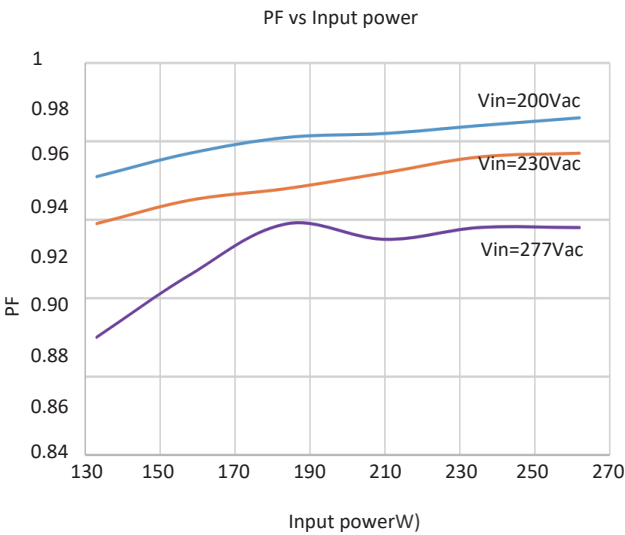


Life curve


Lifespan vs TC temperature

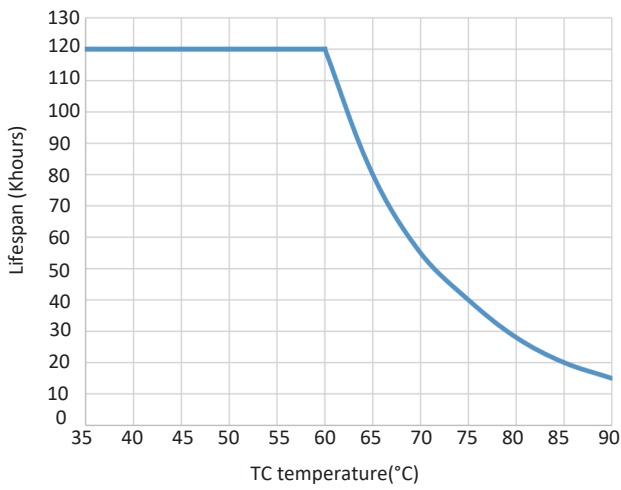

Output power VS Dimming signal

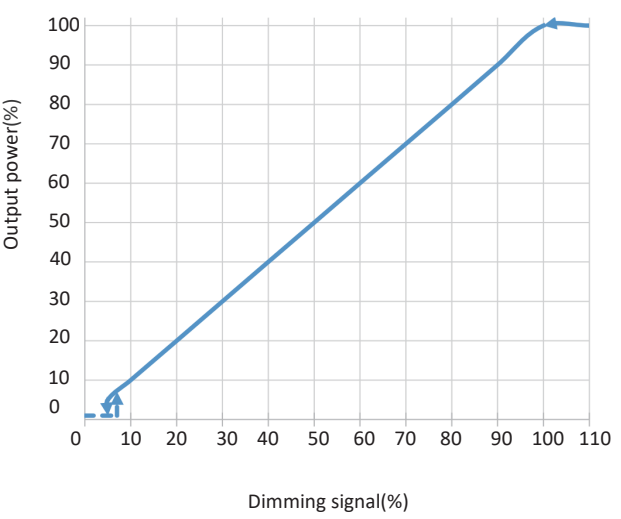

Output power VS Input voltage

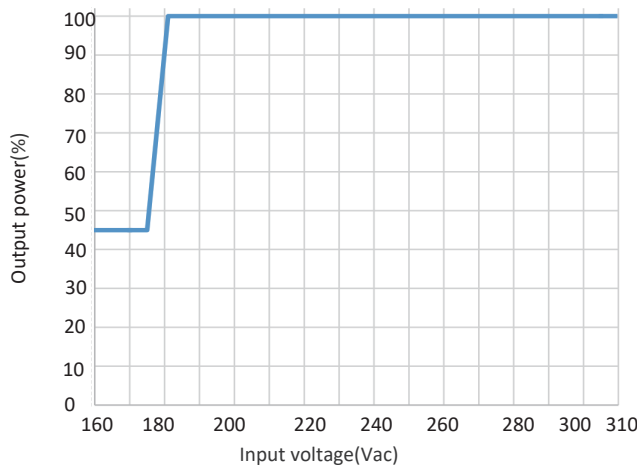

Output power vs TC temperature

